



Unit Specifications

		SQ145	SQ225	SQ120R	SQ166R
Efficiency	kW Output	29.3	35.2	25.8	31.7
	BTU Output	100,000	120,000	88,000	108,000
	C.O.P. Coefficient of Performance	6.8	6.5	5.5	5.6
	kW Input	4.3	5.4	4.7	5.7
Electrical	Heat or Heat & Cool	H	H	H & C	H & C
	Voltage/Hz/Phase	H & D	D	H & D	D
	Max. Fuse Size	H - 60 D - 20	D - 25	H - 60 D - 20	D - 25
	Min. Circuit Ampacity	H - 38.9 D - 14.2	D - 16.2	H - 38.9 D - 14.2	D - 16.2
Refrigerant		R410A	R410A	R410A	R410A
Water Flow	Min./Max. (m³/h)	6.8/15.9	6.8/15.9	6.8/15.9	6.8/15.9
	Min./Max. (gpm)	30/70	30/70	30/70	30/70
A Heater Bypass Kit is required when flow rates exceed the maximum					
Physical	Weight (kg)	149	149	115	149
	Weight (lbs)	328	328	253	328
	Length x Width x Height (cm)	87 x 87 x 112	87 x 87 x 112	87 x 87 x 112	87 x 87 x 112
	Length x Width x Height (in)	34" x 34" x 44"	34" x 34" x 44"	34" x 34" x 44"	34" x 34" x 44"
Shipping	Weight (kg)	177	177	143	177
	Weight (lbs)	390	390	315	390
	Length x Width x Height (cm)	97 x 92 x 125	97 x 92 x 125	97 x 92 x 125	97 x 92 x 125
	Length x Width x Height (in)	38" x 36" x 49"	38" x 36" x 49"	38" x 36" x 49"	38" x 36" x 49"
Specifications subject to change.					



Superior **EFFICIENCY**
and **QUIETER** than
any other heat pump
on the market



AC-107-03_17V1



WWW.
AQUACAL
.COM

MADE IN USA

AquaCal AutoPilot, Inc. • 2737 24th Street North • St. Petersburg, FL 33713 • +1.954.938.5355

HeatWave SuperQuiet®

MAXIMIZE THE ENJOYMENT OF YOUR SWIMMING POOL INVESTMENT

by heating your pool with an AquaCal® heat pump.

Free heat is taken from outside air and transferred to the pool water.

A HEAT PUMP DOESN'T BURN ENERGY TO CREATE HEAT.

It only uses a small amount of energy to transfer **FREE** heat from the air to the pool.



Heat a pool for about **25% of the cost** of heating it with gas



Heat pumps are green and have virtually no effect on your carbon footprint




No other heat pump in its class is quieter

The only heat pump that allows you to maximize the potential savings of a variable speed pump is an AquaCal®, which utilizes our patented **ThermoLink®** technology with its unique flow characteristics.

- Patented hydraulic design adds only 1 PSI at 30 gpm, increasing compatibility with two-speed & variable speed pumps.
- Saves money when using a variable speed pump by reducing the RPM needed to achieve the same flow rate.
- Save money in a single speed pump application by reducing the run time needed to achieve the same turnover rate of the pool.

How the **thermoLINK** Works

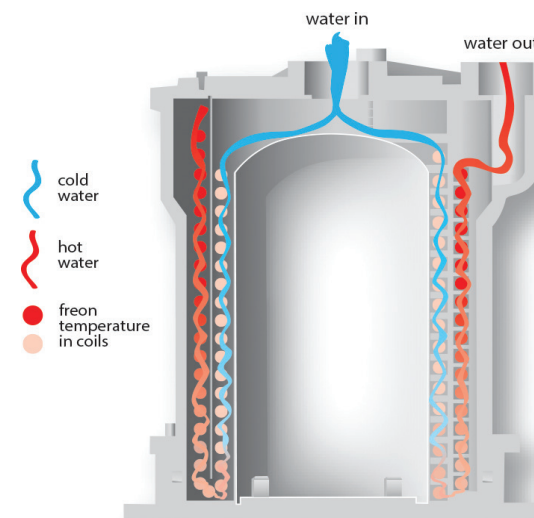

ICEBREAKER® Heat & Cool Models

- Extends swimming season longer than any other heat pump on the market
- Continue to heat at freezing temperatures to minimize heat loss
- Cool your pool to a refreshing temperature
- Set to heat, cool or autotemp

Corrosion Proof Cabinet

- Louvered side panels protect evaporator coil while ensuring efficient air flow
- Rust and fade proof
- Impact resistant
- Built-in drain pan provides condensate management

AquaTop

- Air Flow Vectoring Top protects internal components from weather and debris while ensuring optimal air flow

Microprocessor Controlled with Digital Display

- Flip-out control panel is out of sight, protected against sun and weather
- Lockable panel provides security from others changing the temperature
- Accurate and easy-to-read bright blue display
- On-board self diagnostics
- Microprocessor controlled defrost cycle

ThermoLink® Titanium Heat Exchanger

- Patented counter-flow water management system
- Patented hydraulic design adds only 1 PSI at 30 gpm, increasing compatibility with two-speed & variable speed pumps
- Impervious to chemical corrosion
- Durability without sacrificing performance
- Lifetime warranty



AquaCal® has been producing quality heat pumps since 1981



Setting the standard for excellence in the industry for over 35 years



Over 275,000 happy customers worldwide

